


## Overview

### At A Glance

- Dazzling Transflective TFT color with LED backlight display
- Removable/rechargeable battery - capabilities for extended use while away from a power source
- SD memory card slot for transferring and storing music, picture and more
- Stay productive with Pocket versions of familiar applications like Microsoft® Outlook®, Word and Excel
- Entertainment while on the go with games, music and video
- Microsoft® Pocket PC 2002

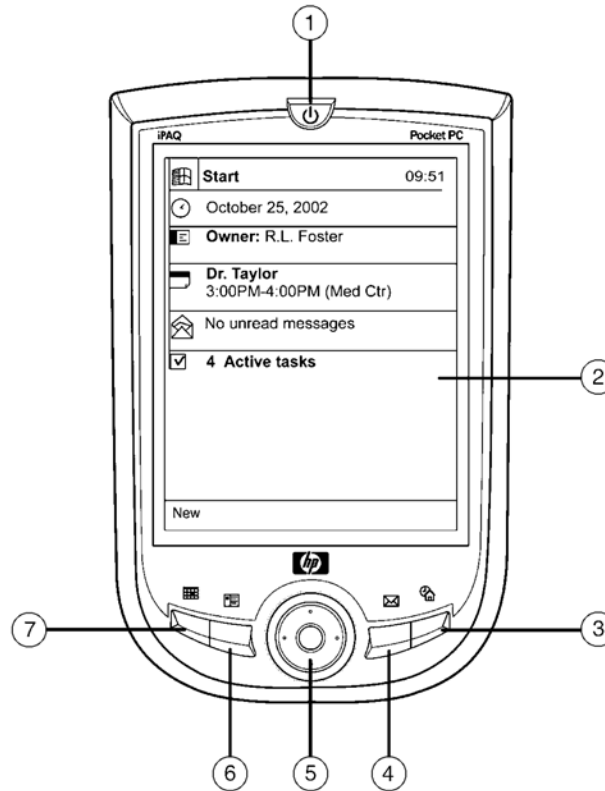

LINE ART \_ - CORRECTION  
#4 = should read – Inbox Button

1. Power Button
2. Color Display
3. Today Button
4. Mail Button

5. 5-Way Navigation Button
6. Contacts Button
7. Calendar Button



## Standard Features

### Models

iPAQ Pocket PC h1910 – 48-MB SDRAM/16 MB NAND Flash  
311324-001

<b>Processor</b>	Intel PXA 250 (200 MHz)	
<b>Memory</b>	<b>NAND Flash</b>	16 MB
	<b>SDRAM</b>	64 MB (46 MB user accessible)
<b>Display</b>	<b>Type</b>	Transflective type TFT color with LED backlight
	<b>Number of Colors</b>	64K color (65,536 colors) 16-bit
	<b>Touch Screen</b>	Yes
	<b>Resolution (W x H)</b>	240 x 320
	<b>Viewable Image Size</b>	3.5 in / 96 mm
<b>Hardware Buttons/Reset Buttons</b>	One power button, one recording button, one soft reset switch, four software programmable application buttons, one navigation button	
<b>Stylus</b>	One	
<b>Audio</b>	Microphone, speaker, one 2.5 mm earphone jack, MP3 stereo (through audio jack)	
<b>Notification Systems</b>	<b>Alarms</b>	Solid amber LED – battery in unit fully charged Flashing amber LED – battery in unit is charging Flashing green LED – event alarm/notification
	<b>Notification</b>	Sound and message on the display
<b>SD Slot</b>	Support SD/MMC type standard	
<b>Power Supply</b>	<b>Battery</b>	Rechargeable 900 mAh Lithium-Ion user swappable battery, battery fully charge time: 4 hours
	<b>AC Power</b>	AC Input: 100–240 Vac, 50/60 Hz, AC Input current: 0.2 Aac max Output Voltage: 5Vdc (typical), Output Current: 2A (typical)
	<b>NOTE:</b> Battery life varies based on the usage pattern of an individual user and the configuration of the handheld. Use of some attachments may significantly decrease battery life.	
<b>Ergonomic Design Features</b>	Instant-on/off and front light Navigation button Touch-sensitive display for stylus 5 customizable application launch buttons – Calendar, Contacts, Inbox, Today, and Recorder buttons 3 alarm settings Built-in speaker	
<b>Applications on Device</b>	Powered by Microsoft Windows® for Pocket PC 2002 Calendar, Contacts, Tasks, Voice Recorder, Notes, Pocket Word (with Spellchecker), Pocket Excel, Pocket Internet Explorer, Calculator, Solitaire, Inbox (with Spell Checker for email), File Explorer, VPN Client, Infrared Beaming, Clock, Align Screen, File Explorer, Memory, Volume control, Asset Viewer	
<b>Applications on Companion CD</b>	Additional Software and links on CD Outlook 2000, Microsoft ActiveSync® 3.5 (Desktop device synchronization), Links to Microsoft Web sites for additional downloadable applications (some programs may require purchase of additional desktop software to utilize Pocket PC versions), Windows Media Player 8 (MP3, audio and video streaming)	

## *Standard Features*

---

<b>Operating System</b>	Microsoft Pocket PC 2002
<b>Service and Support</b>	One-year parts and labor, 90 days technical support for software. Optional CarePAQ™ available in North America for Next Business Day replacement (at additional charge).

## Options

**NOTE:** Optional accessories are available at additional cost.

<b>Memory/Storage</b>	64-MB SD Memory Card	253478-B21
<b>Power</b>	Slim 900 mAh Lithium Ion Rechargeable Battery	311315-B21
<b>Synchronization</b>	USB Desktop Cradle/Charger (USB only)	311317-B21
<b>Other</b>	Stylus Three-pack	311311-B21

## Technical Specifications

<b>System Unit</b>	<b>Dimensions (L x W x H)</b>	4.46 x 2.75 x 0.50 in/113.3 x 69.8 x 12.8 mm		
	<b>Weight</b>	4.23 oz/120 g		
	<b>Operating Temperature</b>	32° to 104° F/0° to 40° C		
	<b>Storage Temperature</b>	-4° to 140° F/-20° to 60° C		
	<b>Operating Humidity</b>	90% RH		
	<b>Regulatory Marks</b>	Electrical	FCC Class B, UL or CSA NRTL	
		Safety	C-UL, NOM	
	<b>SDRAM</b>	64 MB (46 MB user accessible)		
	<b>NAND Flash</b>	16 MB		
<b>TFT Color Display</b>	<b>Number of Colors</b>	65,536 (64K 16-bit)		
	<b>Resolution (W x H)</b>	240 x 320		
	<b>Dot Pitch</b>	0.24 mm		
	<b>Viewable Image (W x H)</b>	2.26 x 3.02 in/57.6 x 76.8 mm, 3.5 in (96 mm)		
	<b>Display Type</b>	64K color (16-bit) transfective type TFT color with LED		
<b>AC Adapter</b>	<b>Dimensions (H x W x D)</b>	3 x 1.9 x 1.8 in/76 x 48 x 44 mm (including prongs)		
	<b>Cord Length (approximate)</b>	6 ft/1.83 m		
	<b>Power Supply Ratings</b>	Voltage Range	100 to 240 V Switching	
		Input Current	0.3 A	
		Input Frequency	50 to 60 Hz	
		Output Voltage	5 VDC	
Output Current		2 Amp		

HP PCs use genuine Microsoft® Windows®

<http://www.microsoft.com/piracy/howtotell>

© 2002 Hewlett-Packard Company

Hewlett-Packard Company shall not be liable for technical or editorial errors or omissions contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material. The information in this document is provided "as is" without warranty of any kind, including, but not limited to, the implied warranties of merchantability and is subject to change without notice. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty.

Microsoft, Windows, and ActiveSync, are registered trademarks or trademarks of Microsoft Corporation. Intel is a registered trademark of Intel Corporation in the United States and/or other countries. Macromedia, Flash and Macromedia Flash are registered trademarks or trademarks of Macromedia, Inc. in the United States and/or other countries. Adobe, Acrobat and Acrobat Reader are trademarks or registered trademarks of Adobe Systems Incorporated. All other product names mentioned herein may be trademarks of their respective companies.

